


# DURACELL®

## TECHNICAL DATA SHEET

Type no.	DS 70
Article no.	010570440801
EAN/GTIN no.	9005753086210
Application	Starter battery
<b>Electrical data</b>	
Rated voltage	12V
Rated capacity	70 Ah (K20)
Cold start current	640 A (EN)
<b>Dimensions and weights</b>	
Box	LB3
Length max.	278mm
Width max.	175mm
Box height max.	175mm
Total height max.	175mm
Battery weight	Ca. 17,0 kg (+/- 5 %)
Electrolyte density	Approx. 1,28 kg/l
Electrolyte	Diluted sulphuric acid
Items/pallet	64
Pallet ID	Euro pallet
Items per layer	16
<b>Features</b>	
Base hold-down	B13
Layout	0
Terminal	1
Separator	PE bag separator
Degassing	Battery with central degassing
Flame arrester	Integrated
Performance identification	W4 - C2 - V1 - E1
<b>Maintenance 1)</b>	
Water consumption	W4
Refill water	Destilliert oder entmineralisiert (DIN 43530)
Self-discharge	Ca. 3 % pro Monat
Charging current	Ca. 1/10 der Nennkapazität
Charging voltage 2)	max. 14,8 V

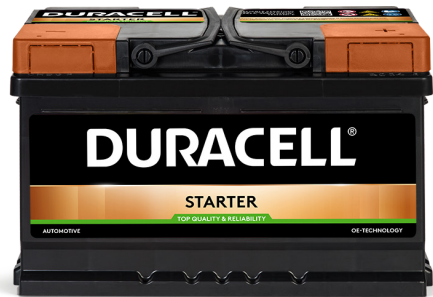

1) All the listed values relate to room temperature +25° C

2) Recommendation with an external, voltage-regulated charge. Attention: Temperature compensation in case of deviation!

Duracell Automotive c/o Banner GmbH

Banner Straße 1, A-4021 Linz, tel.: +43/(0)732/38 88-0, Fax DW-21599

e-mail: info@duracell-automotive.com, [www.duracell-automotive.com](http://www.duracell-automotive.com)



[duracell-automotive.com](http://duracell-automotive.com)