



## Yuasa Technical Data Sheet

### Yuasa YBX3100 - YBX3000 SMF Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	71Ah
Cold Cranking Amps (EN1)	680A

#### Dimensions

Length	278mm
Width	175mm
Height	175mm



#### Weights & Measures

Mean Weight with Acid	17.1kg
-----------------------	--------

#### Container Features

Case Type	LB3 DIN
Hold Down	B13B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V2-E1

#### Terminal Type

##### T1


Standard DIN Post

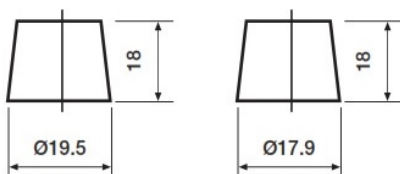

Positive Terminal

Negative Terminal


#### Cell Assembly Layout

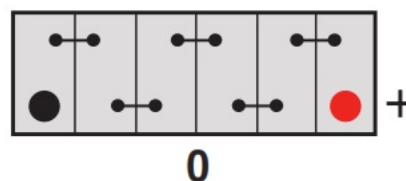

0

#### Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

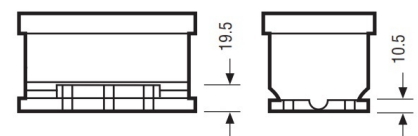

Data Sheet generated on 21/12/2020 - E&OE