



## Yuasa Technical Data Sheet

### Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	70Ah
Cold Cranking Amps (EN1)	760A

#### Dimensions

Length	278mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	20.5kg
-----------------------	--------



#### Container Features

Case Type	L3 DIN AGM
Terminal Type	T1
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	4A
	W5-C2-V3-M3

#### Terminal Type

##### T1


Standard DIN Post

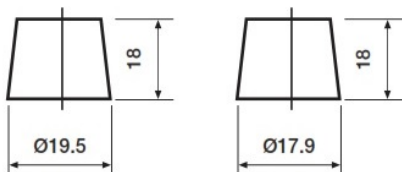


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

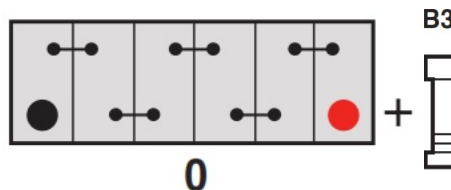

#### Battery Hold-down

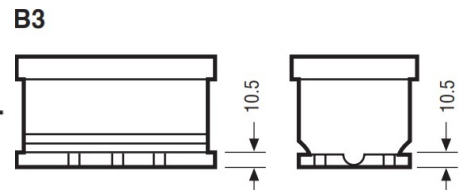

Data Sheet generated on 10/09/2024 - E&OE